


PA11 & PA12 Nylon Hose

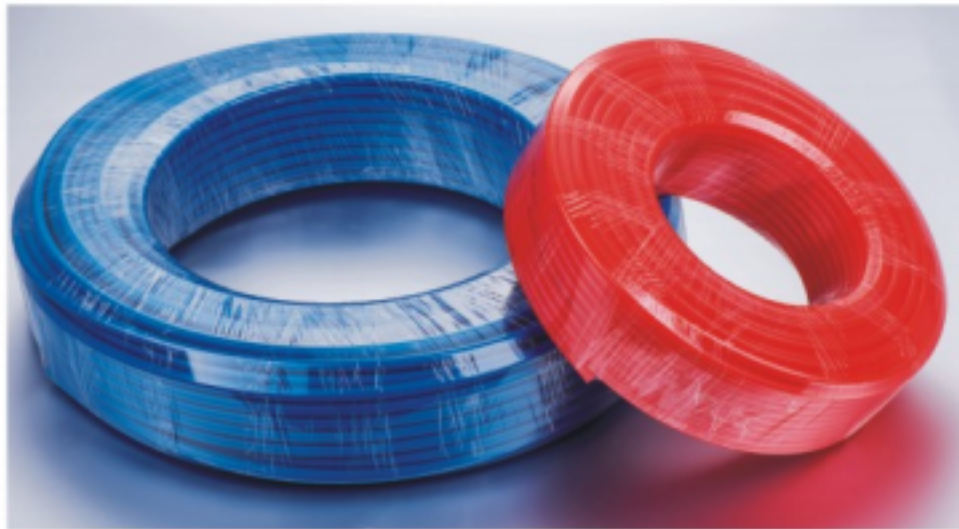

产品特性 Product Characteristic

耐多种化学物质的腐蚀；耐磨损。表面光滑，尺寸稳定；渗透率小，阻力小，能防止生锈和结垢淤积。电阻极大，可以作为绝缘体使用，使用寿命很长，甚至几十年；耐高温性好，可在-40℃到+100℃的环境下使用，可配接头形式：卡套式，竹节式，扣压式和快插式多种颜色可供选择，易于管路识别。

Bears many kinds of chemical substances erode;with good wearability.The surface is smooth,the size is stable,the permeability coefficient is small;the resistance is small,can prevent to rust and silts up.The resistance is enormous,may use as insulator.The service life is very long,even several dozens years; High temperature resistant may work under environment -40℃~+100℃.The joint type with can match:The sleeve chuck type,the bamboo nobe type,the with hold type and the quick insert type.Many colors for choice,for easy pipeline recognition.

颜色 / Color

BU 	C 	O 	B 	G 	Y 	R 
Blue 蓝色	Transparent 透明	Orange 橘黄色	Black 黑色	Green 绿色	Yellow 黄色	Red 红色

产品编码 Item No.	公制尺寸 Metric Measurement		工作压力 Working Pressure	破坏压力 Disruptive Pressure	弯曲半径 Bevelling Radius
	内径 I.D.	外径 O.D.			
	mm	mm			
PA0420	2.0	4.0	45.0	135.0	30.0
PA0530	3.0	5.0	34.0	102.0	35.0
PA0640	4.0	6.0	27.0	81.0	40.0
PA0860	6.0	8.0	19.0	57.0	50.0
PA1075	7.5	10.0	15.0	45.0	60.0
PA1080	8.0	10.0	15.0	45.0	65.0
PA1290	9.0	12.0	19.0	57.0	70.0
PA1410	10.0	14.0	19.0	57.0	100.0
PA1612	12.0	16.0	19.0	57.0	130.0

产品用途/Product Use

输送压缩空气，水，燃料油，化学溶剂，液态食品等。汽车，发动机及其它工程运输和装载机械。

Transport compressed air, water, bunker oil, chemistry solvent, liquid state food and so on; Being used for automobile, engine, other project transportation and loading machinery.

技术参数/Specifications

材料 Material	尼龙 Polyamide
流体 Fluid	空气水 Air, Water
爆破压力 Burst Pressure (20℃)	60bar
最高使用压力 Operation Pressure	45kgf/cm ²
环境及流体温度 Operating Temp	-40℃~+100℃

管外径/Tube O.D.	外径公差/O.D. Tolerance
3mm—5mm	+0.05-0.08
6mm—16mm	+0.05-0.10

型号名称 / Product Code System

